17.3 to 31 GHz SP4T Reflective RF Switch Datasheet

Product ID: SW00008 Model: S4TR-173310E4B

- SP4T Reflective RF Switch
- Wideband Operation
- Low Insertion Loss: 5 dB Max.
- Fast Switching
- TTL Control

Electrical Specifications

Description	Units	Minimum	Typical	Maximum
Frequency Range	GHz	17.3		31
Maximum Input Power	W			0.2
Insertion Loss	dB			5
VSWR	: 1			2
Isolation	dB	55		
Switching Time	ns			100
Supply Current @ +5 V	mA		200	
Supply Current @ -5 V	mA		50	
Control Interface			PIN	
Control Type			TTL	
Impedance	Ω		50	
Operating Temperature	°C	-45		+85

Note

- Measured at +25 °C, 50 Ω system, sea level, unless otherwise noted.
- Switching time is measured from 50% of the TTL control transition to 90% RF for turn-on and 10% RF for turn-off.
- Rise / fall time is measured from 10% to 90% RF and from 90% to 10% RF, respectively.

Tel : +86-28-8705 7896
E-mail : info@bodemw.com
Add : Chengdu 610000 CHINA
Website : www.bodemw.com

17.3 to 31 GHz SP4T Reflective RF Switch Datasheet

Product ID: SW00008 Model: S4TR-173310E4B

Mechanical Specifications


Dimensions (L×W×H)	52*20*10.2 mm
RF Input Connector	2.92mm-Female Stainless Steel
RF Output Connectors	2.92mm-Female Stainless Steel
Weight	40 g
Finish	Gold Plated
Environment	Nominal
RoHS / REACH Compliant	√

Truth Table

Control Input TTL				Signal PathState
E4	E3	E2	E1	
1	1	1	0	J0-J1
1	1	0	1	J0-J2
1	0	1	1	J0-J3
0	1	1	1	J0-J4

- TTL High (1): 2.8 to 5 V
- TTL Low (0): 0 to 0.8 V
- Low-Power Cold Switching

CAD Drawing

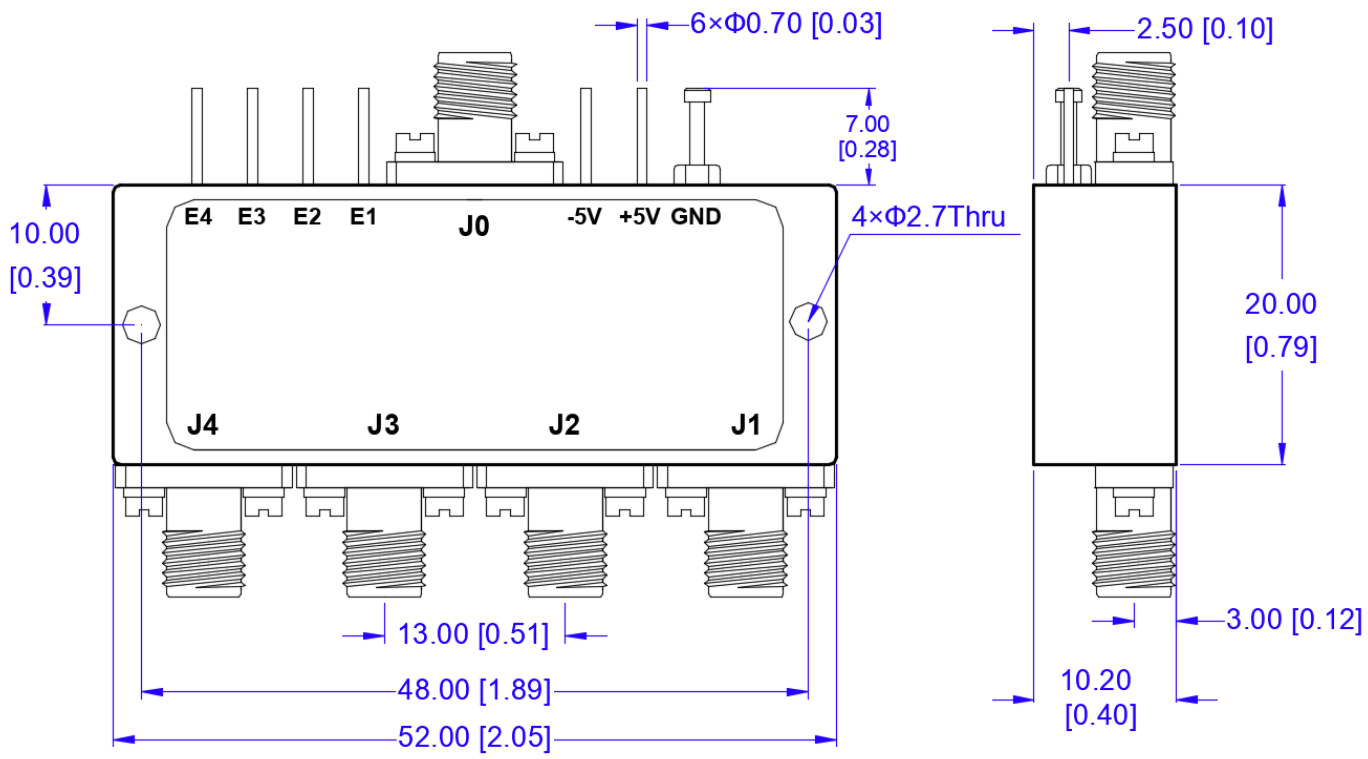

Dimensions are in mm [Inches]
Tolerances: Outline drawing: ±0.2 [0.008]
Hole: ±0.2 [0.008]

BODE MICROWAVE


Tel : +86-28-8705 7896

E-mail : info@bodemw.com


Add : Chengdu 610000 CHINA

Website : www.bodemw.com


J0 to J1 Insertion Loss

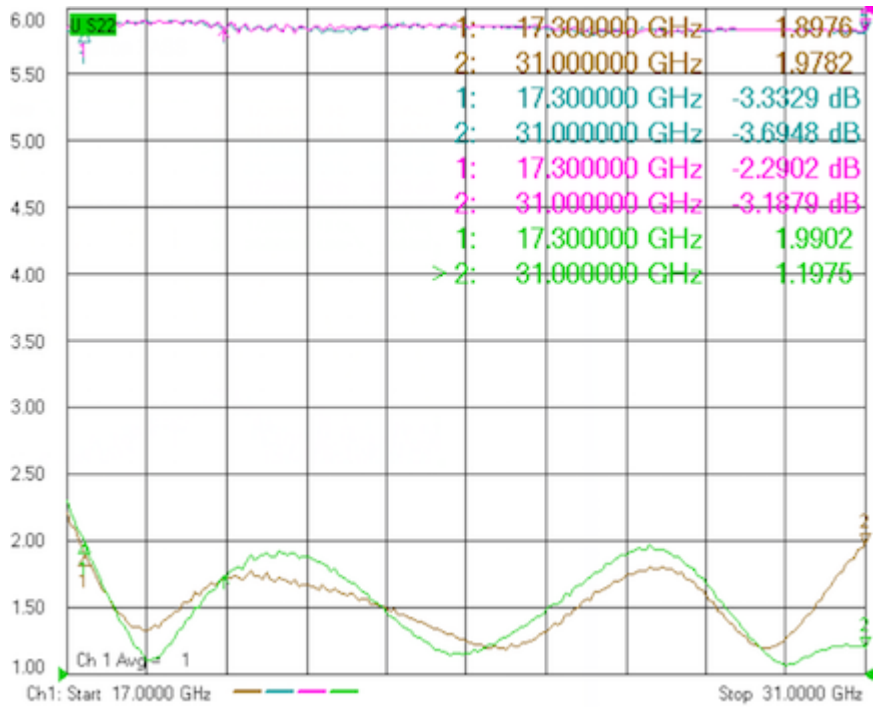


J0 to J1 Isolation

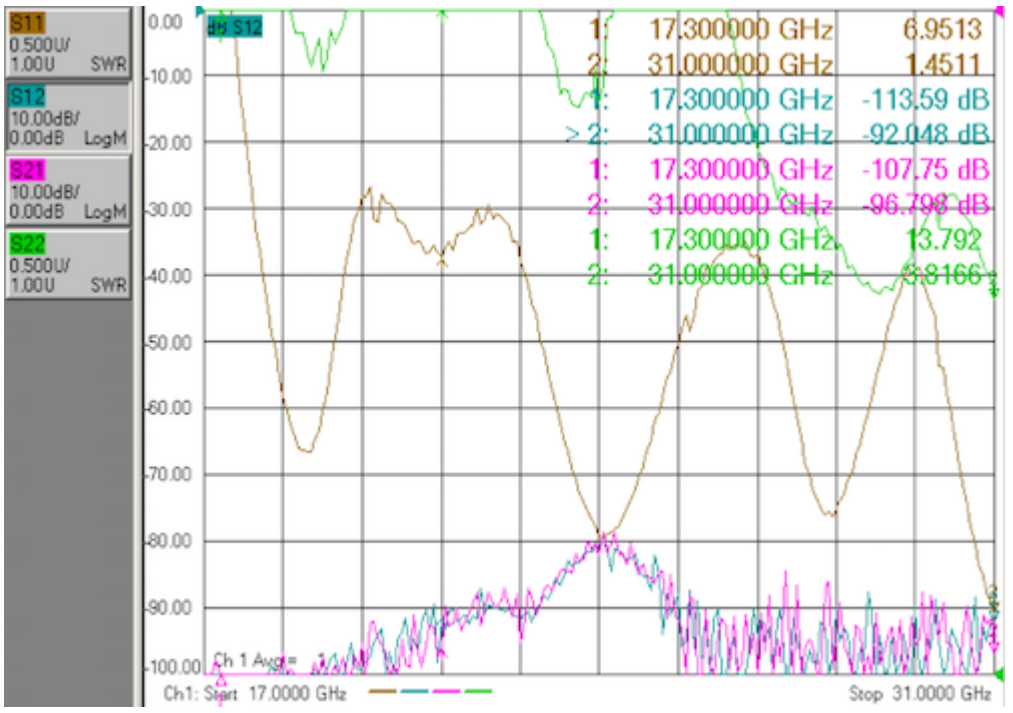

J0 to J2 Insertion Loss

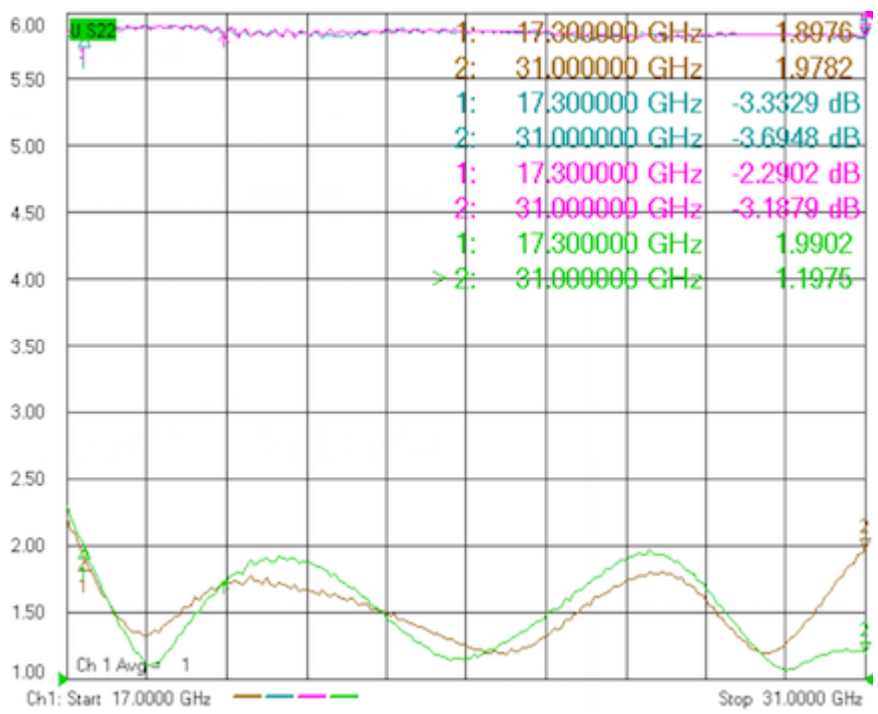

J0 to J2 Isolation

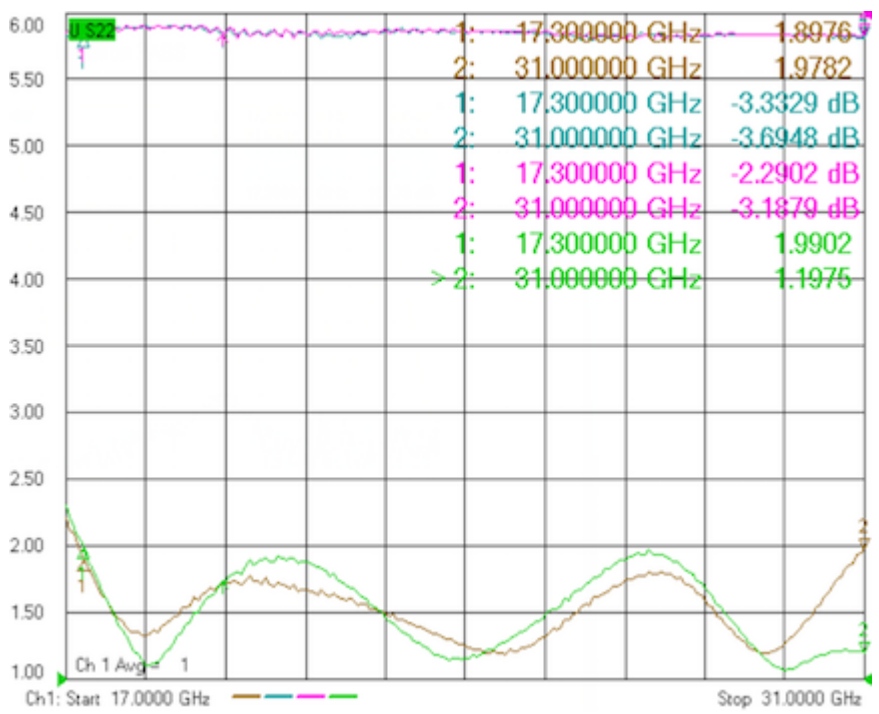

Turn-On Switching Time

Turn-Off Switching Time

BODE MICROWAVE

Tel : +86-28-8705 7896

E-mail : info@bodemw.com

Add : Chengdu 610000 CHINA

Website : www.bodemw.com