6 to 18 GHz SP8T Absorptive RF Switch Datasheet

Product ID: SW00574 Model: S8TA-060180E3B

- SP8T Absorptive RF Switch
- Wideband Operation
- Low Insertion Loss: 4.8 dB Max.
- Fast Switching
- TTL Control

Electrical Specifications

Description	Units	Minimum	Typical	Maximum
Frequency Range	GHz	6		18
Maximum Input Power	W			1
Insertion Loss	dB		4.2	4.8
VSWR	: 1		1.7	2
Isolation	dB	80		
Switching Time	ns			120
Supply Current @ +5 V	mA		400	
Supply Current @ -5 V	mA		50	
Control Interface			PIN	
Control Type			TTL	
Impedance	Ω		50	
Operating Temperature	°C	-45		+85

Note

- Measured at +25 °C, 50 Ω system, sea level, unless otherwise noted.
- Switching time is measured from 50% of the TTL control transition to 90% RF for turn-on and 10% RF for turn-off.
- Rise / fall time is measured from 10% to 90% RF and from 90% to 10% RF, respectively.

Tel : +86-28-8705 7896
E-mail : info@bodemw.com
Add : Chengdu 610000 CHINA
Website : www.bodemw.com

6 to 18 GHz SP8T Absorptive RF Switch Datasheet

Product ID: SW00574 Model: S8TA-060180E3B

Mechanical Specifications


Dimensions (L×W×H)	104*24*10.2 mm
RF Input Connector	SMA-Female Stainless Steel
RF Output Connectors	SMA-Female Stainless Steel
Weight	65 g
Finish	Nickel Plated
Environment	Nominal
RoHS / REACH Compliant	√

Truth Table

Control Input TTL			Signal Path State
E3	E2	E1	
0	0	0	J0-J1
0	0	1	J0-J2
0	1	0	J0-J3
0	1	1	J0-J4
1	0	0	J0-J5
1	0	1	J0-J6
1	1	0	J0-J7
1	1	1	J0-J8

- TTL High (1): 2.8 to 5 V
- TTL Low (0): 0 to 0.8 V
- Low-Power Cold Switching

CAD Drawing

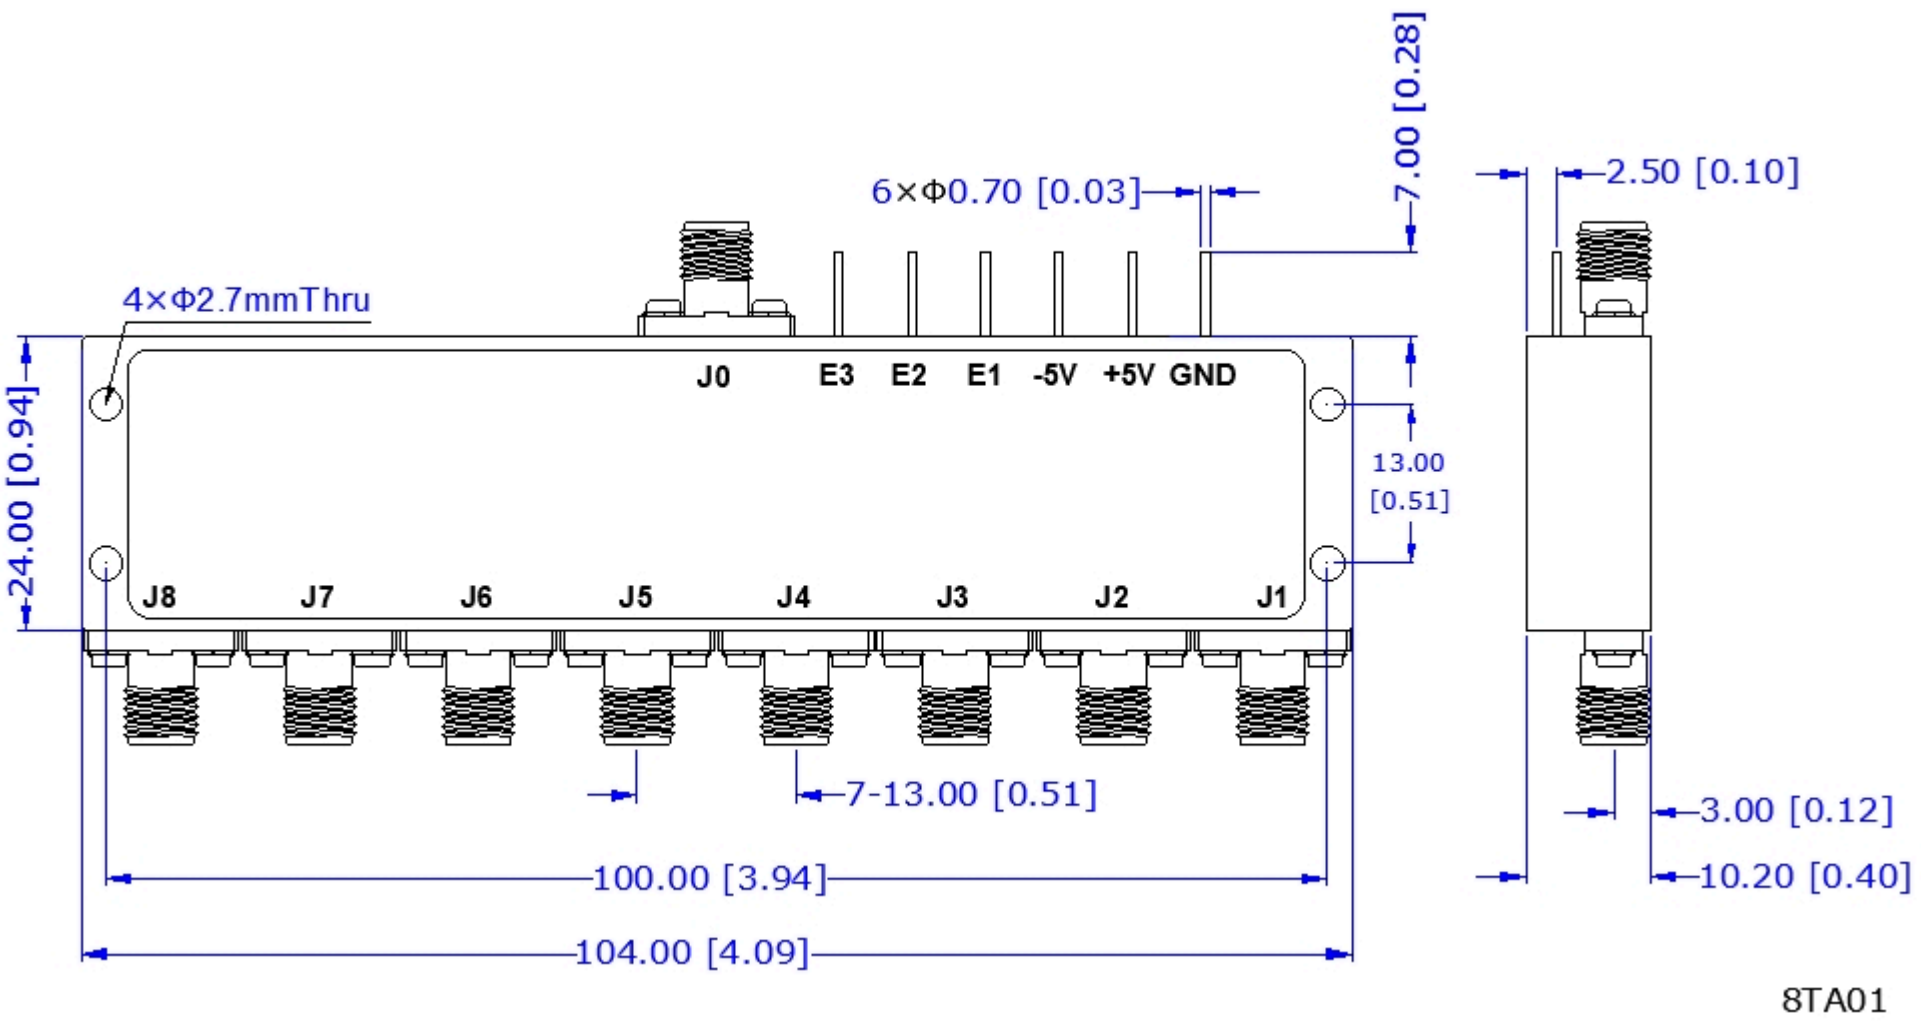

Dimensions are in mm [Inches]
Tolerances: Outline drawing: ±0.2 [0.008]

BODE MICROWAVE

Tel : +86-28-8705 7896

E-mail : info@bodemw.com

Add : Chengdu 610000 CHINA

Website : www.bodemw.com