0.1 to 18 GHz SPST Absorptive RF Switch Datasheet

Product ID: SW00573 Model: SSTA-001180E1B

- SPST Absorptive RF Switch
- Wideband Operation
- Low Insertion Loss: 2.5 dB Max.
- Fast Switching
- TTL Control

Electrical Specifications

Description	Units	Minimum	Typical	Maximum
Frequency Range	GHz	0.1		18
Maximum Input Power	W			0.1
Insertion Loss	dB		2	2.5
VSWR	: 1		1.5	2
Isolation	dB	80	90	
Switching Time	ns			40
Rise / Fall Time	ns			10
Supply Current @ +5 V	mA		50	
Supply Current @ -5 V	mA		50	
Control Interface			PIN	
Control Type			TTL	
Impedance	Ω		50	
Operating Temperature	°C	-45		+85

Note

- Measured at +25 °C, 50 Ω system, sea level, unless otherwise noted.
- Switching time is measured from 50% of the TTL control transition to 90% RF for turn-on and 10% RF for turn-off.
- Rise / fall time is measured from 10% to 90% RF and from 90% to 10% RF, respectively.

BODE MICROWAVE

Tel：+86-28-8705 7896

E-mail：info@bodemw.com

Add：Chengdu 610000 CHINA

Website：www.bodemw.com

0.1 to 18 GHz SPST Absorptive RF Switch Datasheet

Product ID: SW00573 Model: SSTA-001180E1B

Mechanical Specifications


Dimensions (L×W×H)	24*18*10.2 mm
RF Input Connector	SMA-Female Stainless Steel
RF Output Connectors	SMA-Female Stainless Steel
Weight	15 g
Finish	Nickel Plated
Environment	Nominal
RoHS / REACH Compliant	√

Truth Table

Control Input TTL E1 or TTL	Signal Path State
0	ON
1	OFF

- TTL High (1): 2.8 to 5 V
- TTL Low (0): 0 to 0.8 V
- Low-Power Cold Switching

CAD Drawing

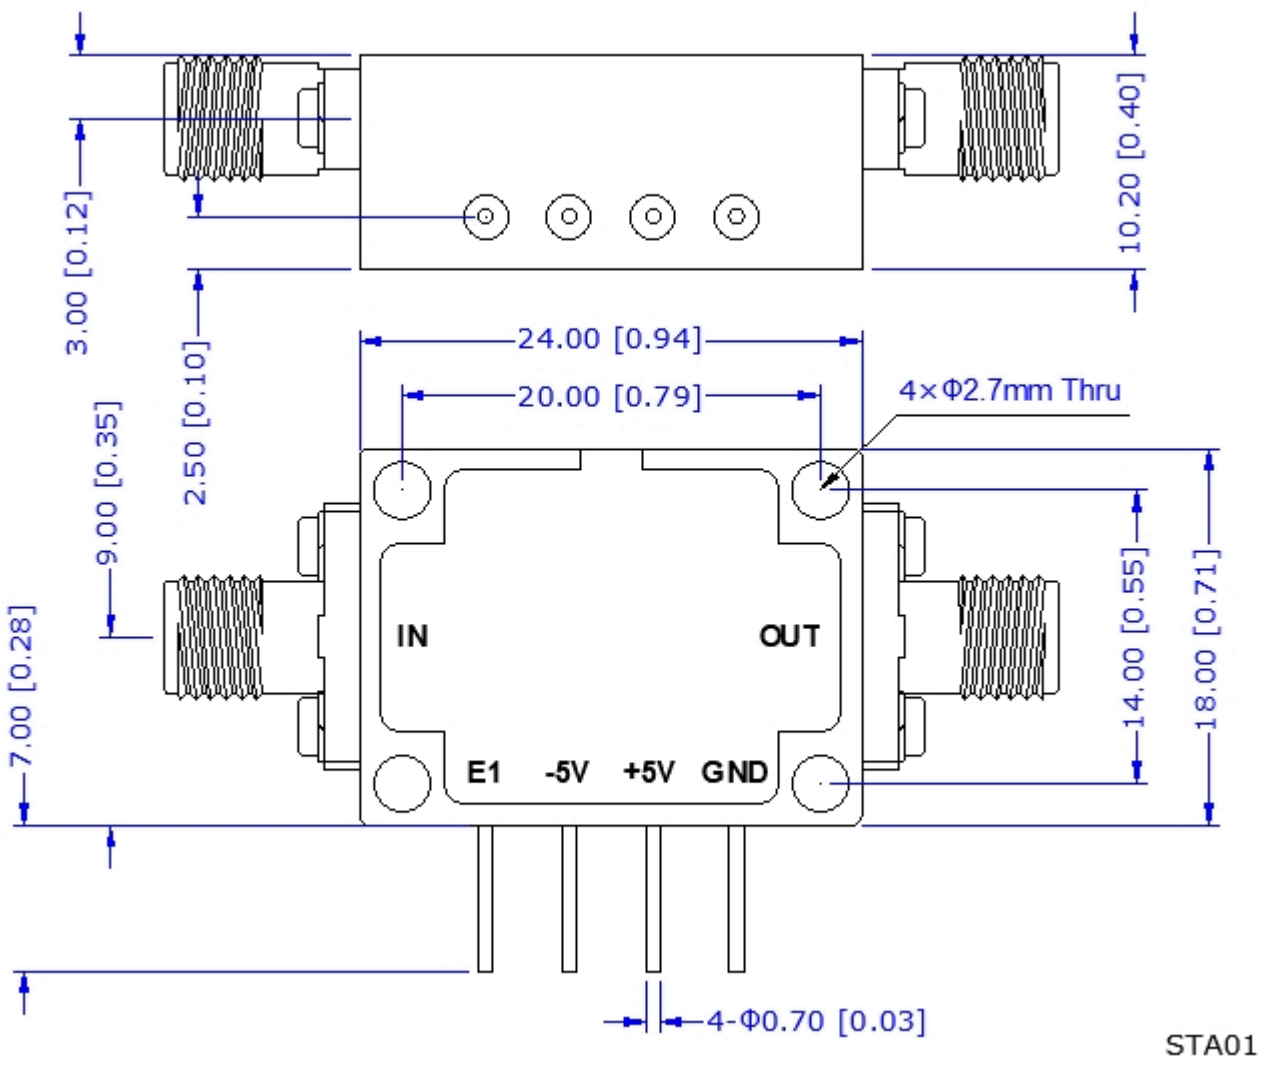


Dimensions are in mm [Inches]
Tolerances: Outline drawing: ±0.2 [0.008]
Hole: ±0.2 [0.008]


BODE MICROWAVE
Tel : +86-28-8705 7896
E-mail : info@bodemw.com
Add : Chengdu 610000 CHINA
Website : www.bodemw.com

Product ID: SW00573 Model: SSTA-001180E1B

J0 to J1 Insertion Loss

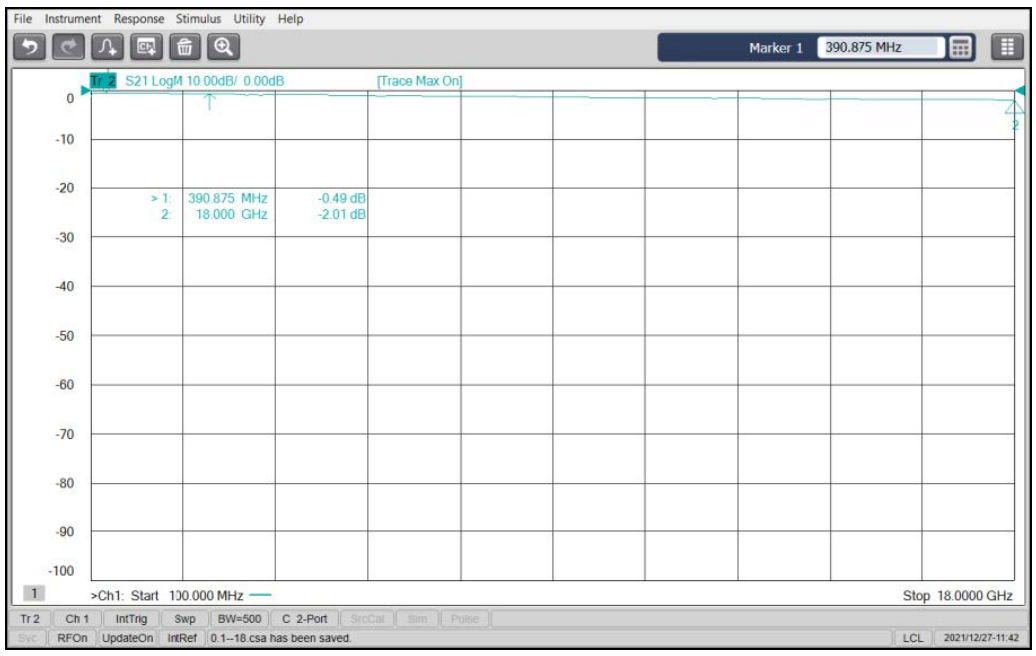


J0 to J1 Isolation

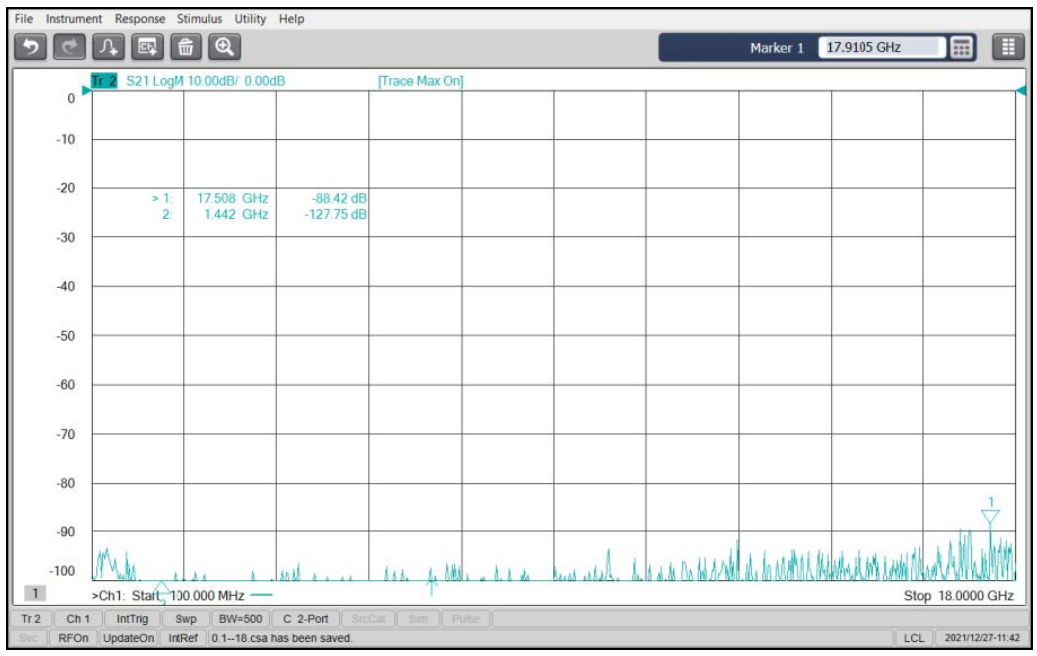


J0 to J2 Insertion Loss

J0 to J2 Isolation

Turn-On Switching Time

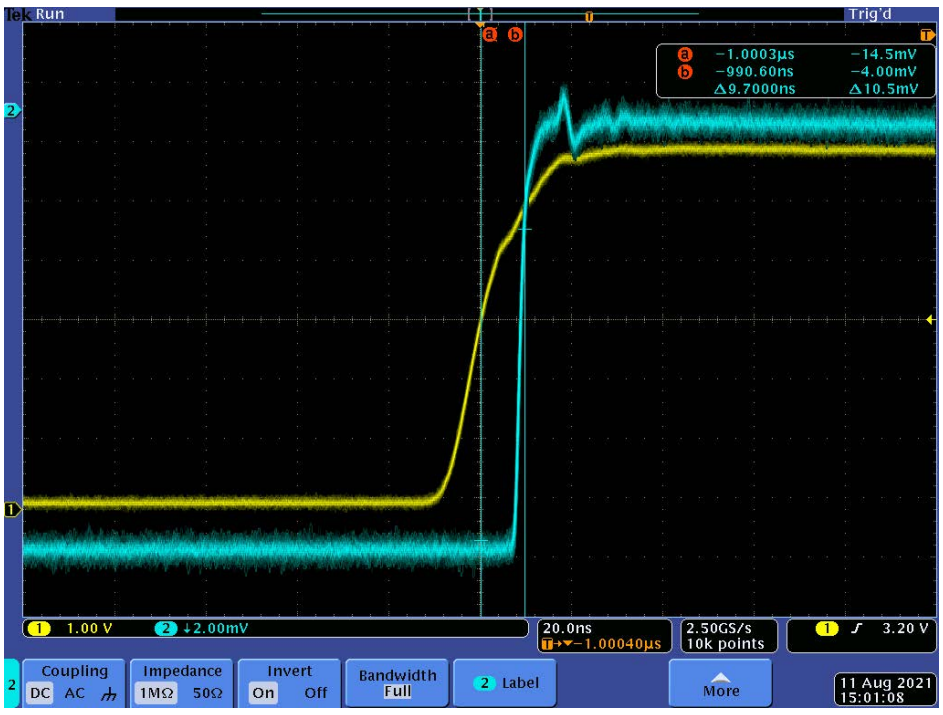

Turn-Off Switching Time

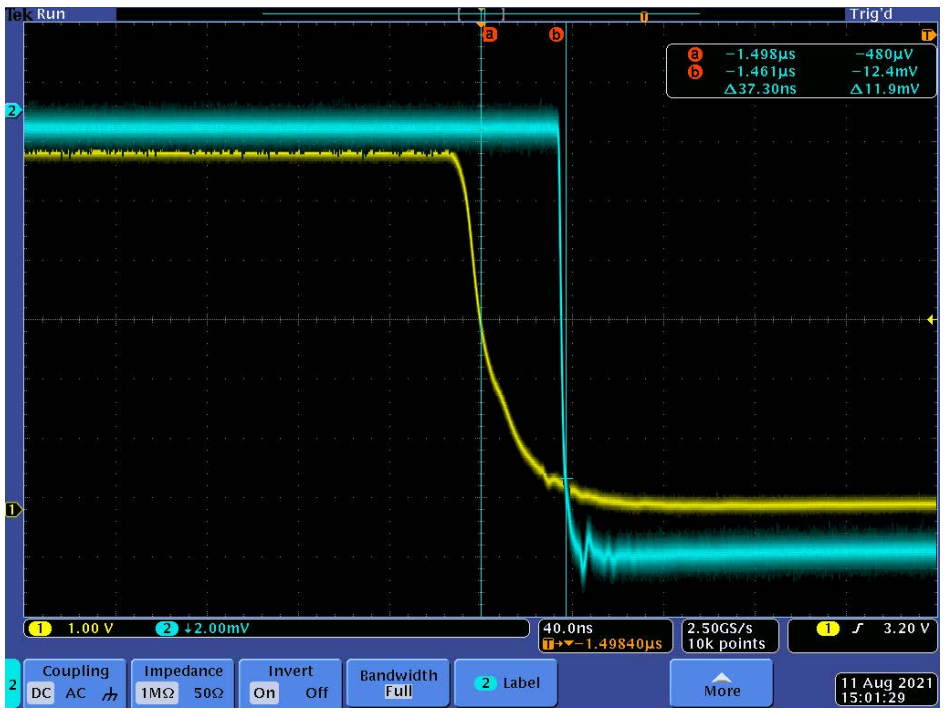

BODE MICROWAVE

Tel：+86-28-8705 7896

E-mail：info@bodemw.com

Add：Chengdu 610000 CHINA

Website：www.bodemw.com