0.5 to 18 GHz SPST Absorptive RF Switch Datasheet

Product ID: SW00315 Model: SSTA-005180EC

- SPST Absorptive RF Switch
- Wideband Operation
- Low Insertion Loss: 3.5 dB Max.
- Fast Switching
- TTL Control

Electrical Specifications

Description	Units	Minimum	Typical	Maximum
Frequency Range	GHz	0.5		18
Maximum Input Power	W			1
Insertion Loss	dB			3.5
VSWR	: 1			2
Isolation	dB	70		
Switching Time	ns			30
Rise / Fall Time	ns			20
Supply Current @ +5 V	mA		50	
Supply Current @ -12 V	mA		50	
Control Interface			PIN	
Control Type			TTL	
Impedance	Ω		50	
Operating Temperature	°C	-45		+85

Note

- Measured at +25 °C, 50 Ω system, sea level, unless otherwise noted.
- Switching time is measured from 50% of the TTL control transition to 90% RF for turn-on and 10% RF for turn-off.
- Rise / fall time is measured from 10% to 90% RF and from 90% to 10% RF, respectively.

BODE MICROWAVE

Tel：+86-28-8705 7896

E-mail：info@bodemw.com

Add：Chengdu 610000 CHINA

Website：www.bodemw.com

0.5 to 18 GHz SPST Absorptive RF Switch Datasheet

Product ID: SW00315 Model: SSTA-005180EC

Mechanical Specifications


Dimensions (L×W×H)	24*20*10.20 mm
RF Input Connector	SMA-Female Stainless Steel
RF Output Connectors	SMA-Female Stainless Steel
Weight	15 g
Finish	Gold Plated
Environment	Nominal
RoHS / REACH Compliant	√

Truth Table

Control Input TTL	Signal Path State
E1 or TTL	
0	ON
1	OFF

- TTL High (1): 2.8 to 5 V
- TTL Low (0): 0 to 0.8 V
- Low-Power Cold Switching

CAD Drawing

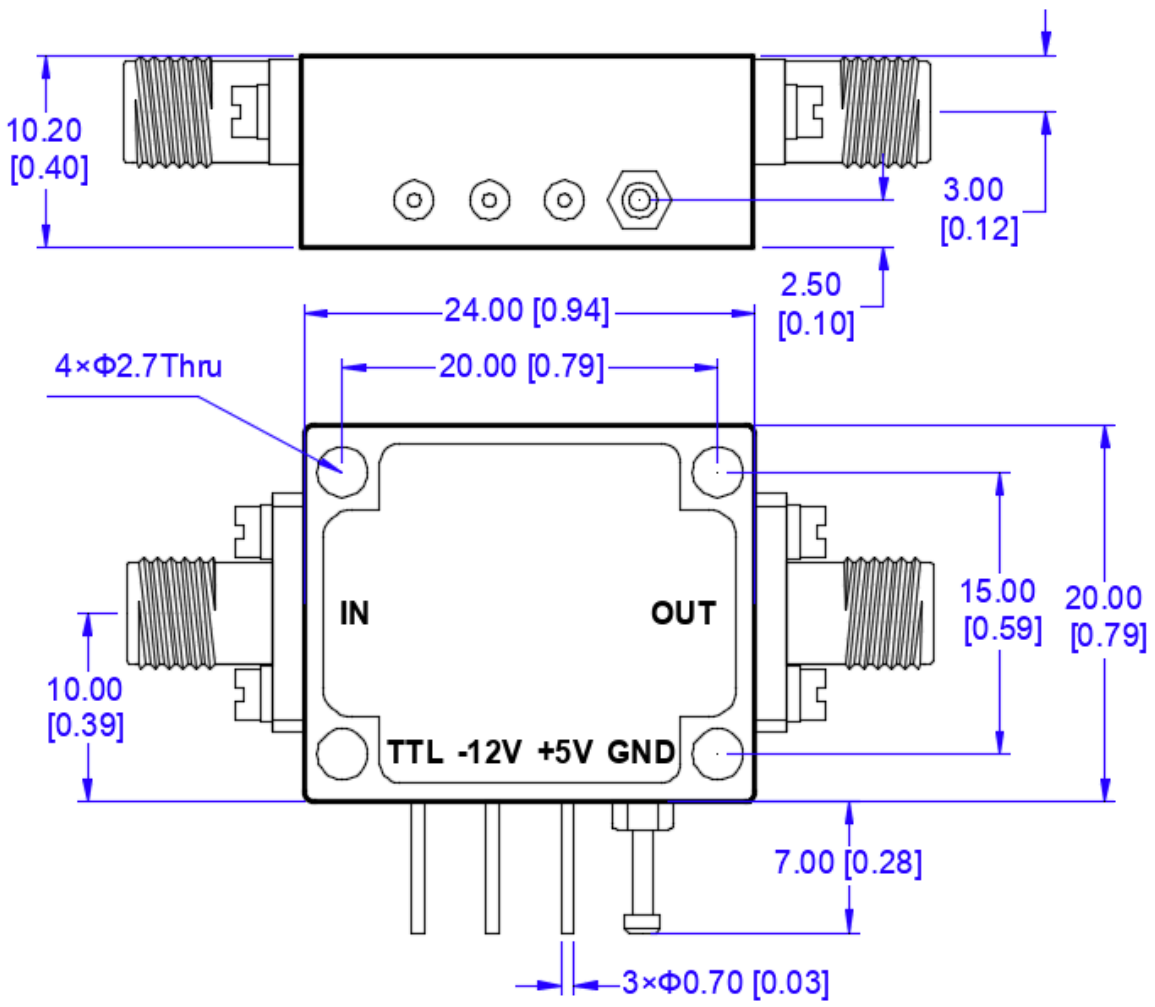

Dimensions are in mm [Inches]
Tolerances: Outline drawing: ±0.2 [0.008]
Hole: ±0.2 [0.008]

BODE MICROWAVE


Tel：+86-28-8705 7896

E-mail：info@bodemw.com


Add：Chengdu 610000 CHINA

Website：www.bodemw.com


J0 to J1 Insertion Loss

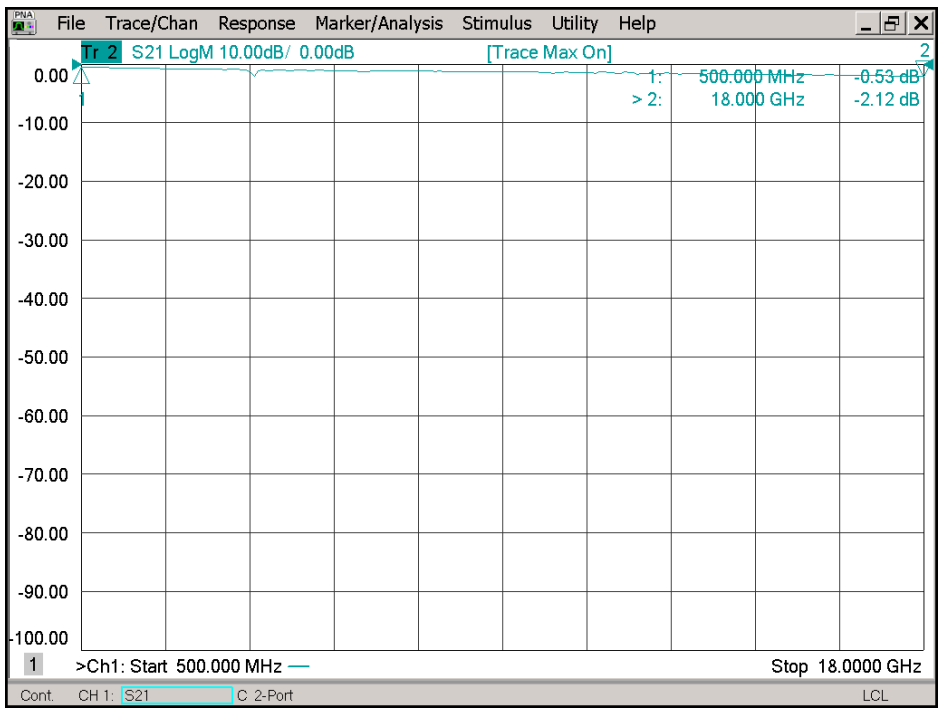


J0 to J1 Isolation

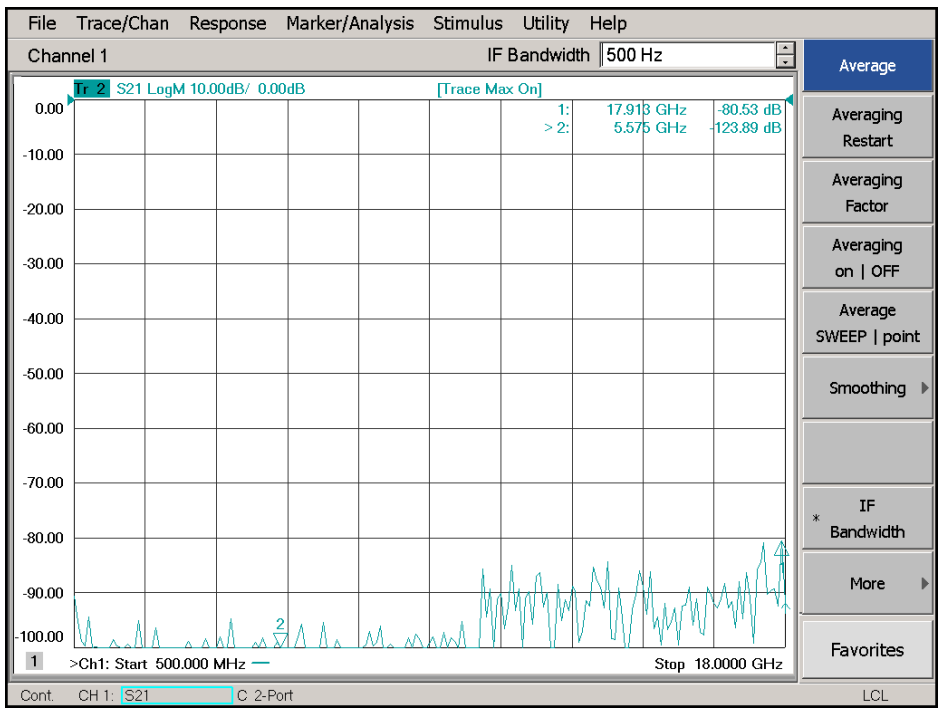


J0 to J2 Insertion Loss

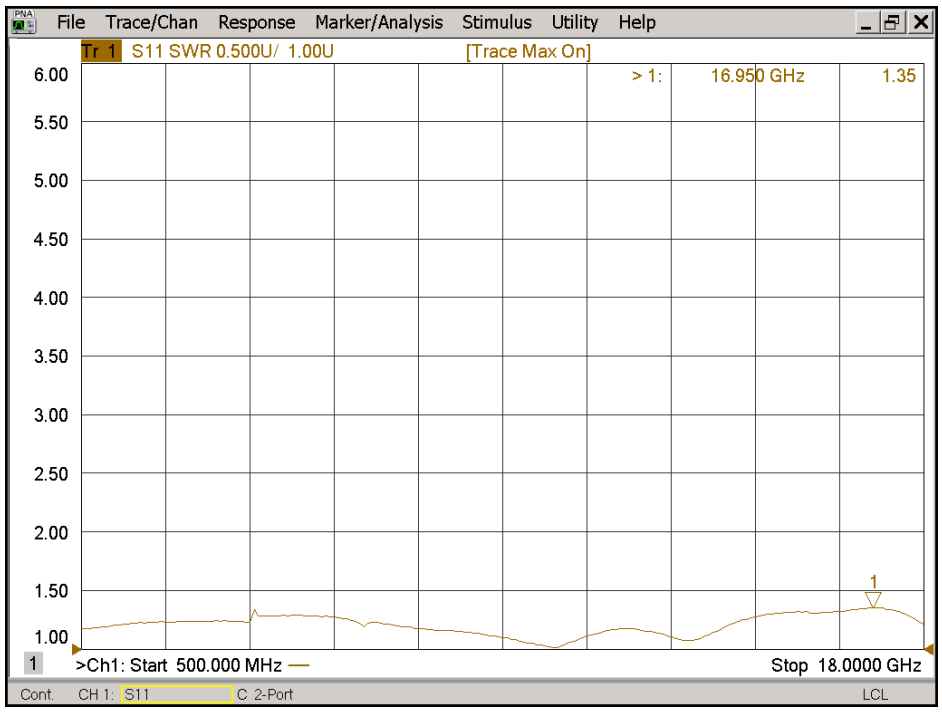


J0 to J2 Isolation

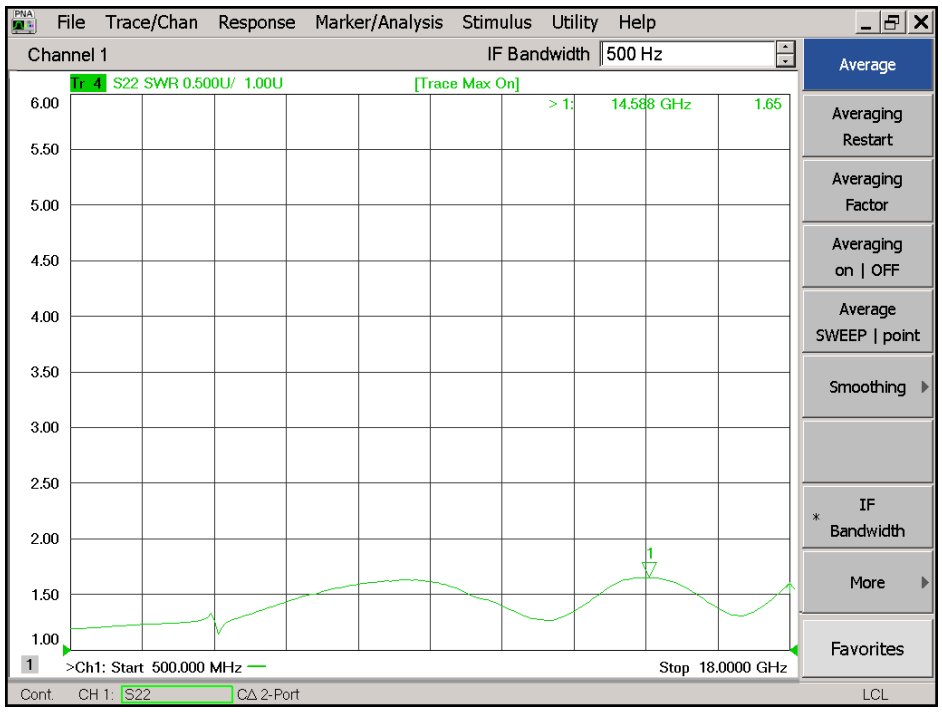

Turn-On Switching Time

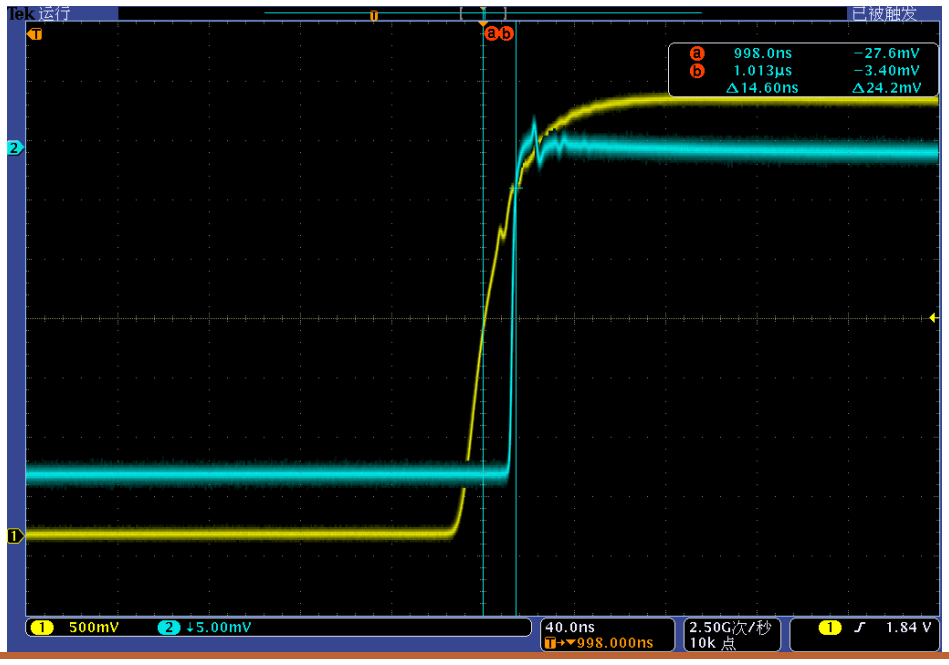

Turn-Off Switching Time

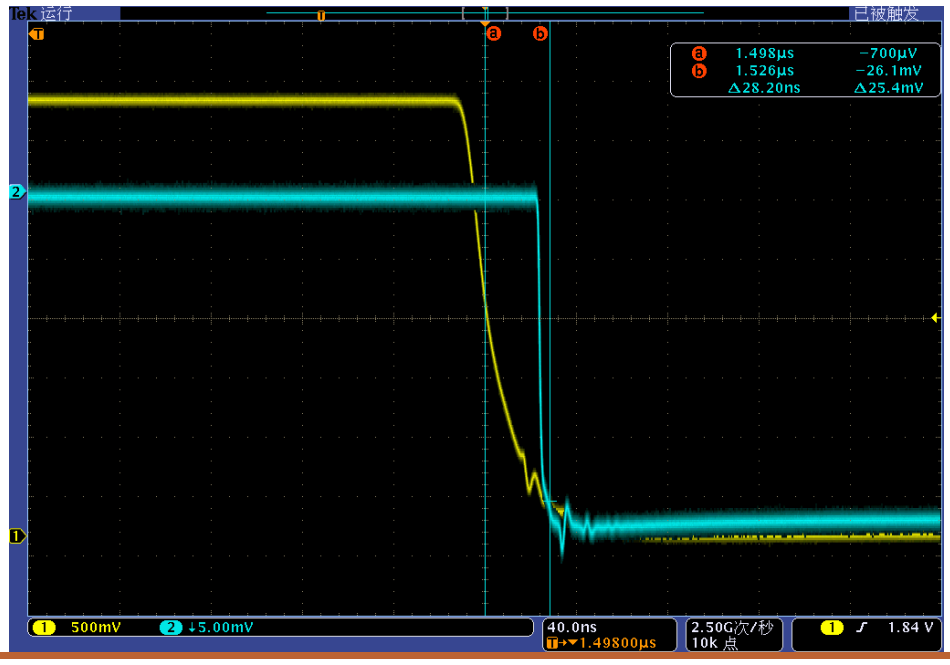

BODE MICROWAVE

Tel：+86-28-8705 7896

E-mail：info@bodemw.com

Add：Chengdu 610000 CHINA

Website：www.bodemw.com