# 12 to 18 GHz SPDT Absorptive RF Switch Datasheet

Product ID: SW00658 Model: SDTA-120180E1B

- SPDT Absorptive RF Switch
- Wideband Operation
- Low Insertion Loss: 3 dB Max.
- Fast Switching
- TTL Control

## Electrical Specifications

| Description | Units | Minimum | Typical | Maximum |
|---|---|---|---|---|
| Frequency Range | GHz | 12 | | 18 |
| Maximum Input Power | W | | | 1 |
| Insertion Loss | dB | | 2.5 | 3 |
| VSWR | : 1 | | 1.7 | 2 |
| Isolation | dB | 60 | 70 | |
| Switching Time | ns | | | 100 |
| Supply Current @ +5 V | mA | | 100 | |
| Supply Current @ -5 V | mA | | 50 | |
| Control Interface | | | PIN | |
| Control Type | | | TTL | |
| Impedance | Ω | | 50 | |
| Operating Temperature | °C | -45 | | +85 |

## Note

- Measured at +25 °C, 50 Ω system, sea level, unless otherwise noted.
- Switching time is measured from 50% of the TTL control transition to 90% RF for turn-on and 10% RF for turn-off.
- Rise / fall time is measured from 10% to 90% RF and from 90% to 10% RF, respectively.

# 12 to 18 GHz SPDT Absorptive RF Switch Datasheet

Product ID: SW00658 Model: SDTA-120180E1B

## Mechanical Specifications


| | |
|---|---|
| Dimensions (L×W×H) | 25*17.5*10.2 mm |
| RF Input Connector | SMA-Female Stainless Steel |
| RF Output Connectors | SMA-Female Stainless Steel |
| Weight | 15 g |
| Finish | Nickel Plated |
| Environment | Nominal |
| RoHS / REACH Compliant | √ |

## Truth Table

| Control Input TTL | Signal Path State |
|---|---|
| E1 or TTL | |
| 0 | J0-J1 |
| 1 | J0-J2 |

- TTL High (1): 2.8 to 5 V
- TTL Low (0): 0 to 0.8 V
- Low-Power Cold Switching

## CAD Drawing

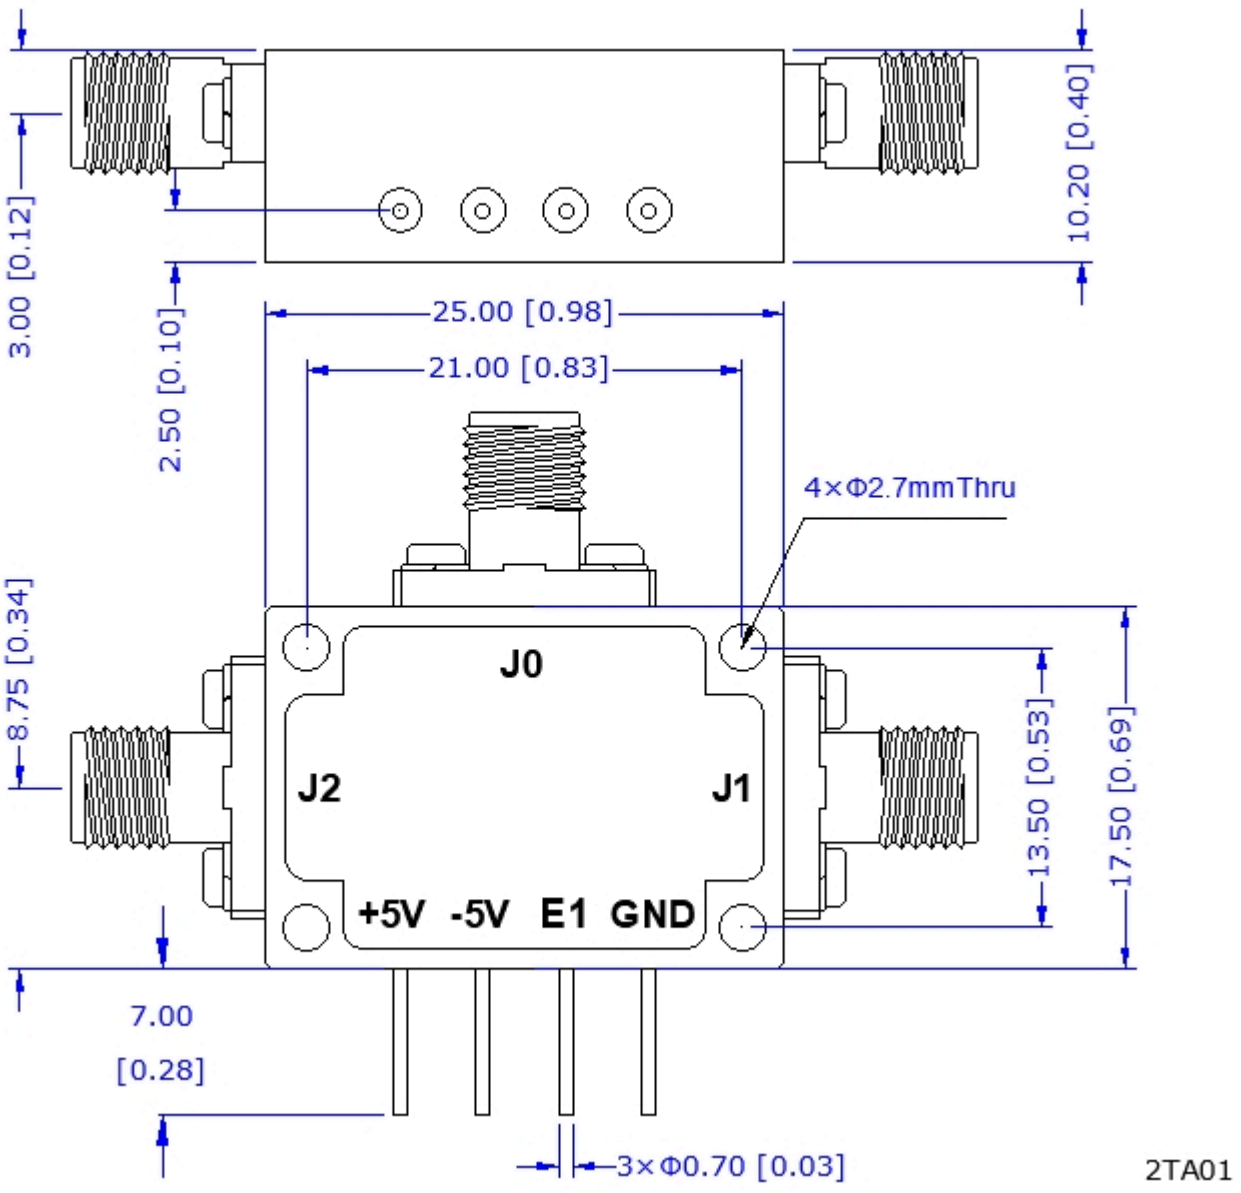


Dimensions are in mm [Inches]
Tolerances: Outline drawing: ±0.2 [0.008]
Hole: ±0.2 [0.008]


BODE MICROWAVE

Tel : +86-28-8705 7896

E-mail : info@bodemw.com

Add : Chengdu 610000 CHINA

Website : www.bodemw.com